


# DELTA LINEAR

## BR-T180W



**Brightman™**  
design efficiency

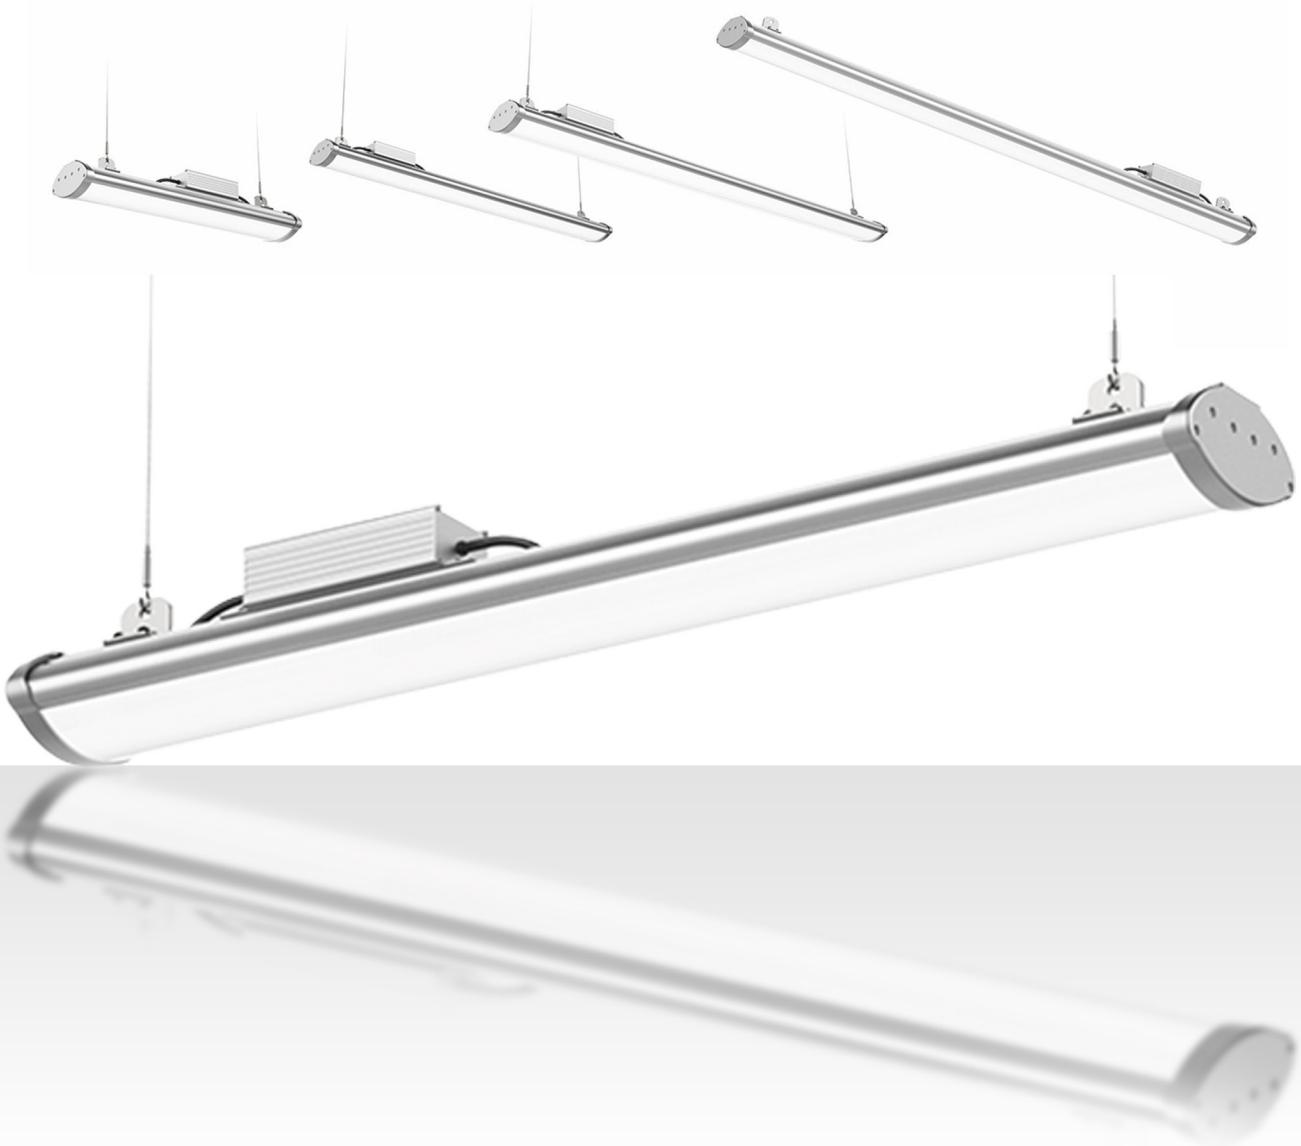

# TECHNICAL DATA



DELTA LINEAR BR-T180W

<b>Input Voltage</b>	AC110-277V ~ 50/60 Hz
<b>LED Chips</b>	Philips EMC3030
<b>Driver</b>	TOMCARLINE
<b>LED Quantity</b>	252pcs
<b>LED Power</b>	180W
<b>Led Luminous Efficiency</b>	140lm/w
<b>Luminous Flux</b>	25,200lm
<b>Power Factor</b>	>0.90
<b>Colour Temperature</b>	3000K / 4000K / 5000K / 6500K
<b>Colour Rendering Index</b>	Ra≥70
<b>Beam Angle</b>	120°
<b>Dimmable</b>	Optional 1-10V / DALI
<b>Working Temperature</b>	-20°C ~ 69°C
<b>Working Humidity</b>	10%~ 90% RH
<b>IP Rating</b>	IP65
<b>Net weight</b>	6.0Kg
<b>Life-span</b>	>50,000hrs
<b>Power Cable</b>	1.0mm <sup>2</sup> Triple shield wire
<b>Connection Wire</b>	Brown=Live, Blue=Neutral, Yellow=Earth
<b>Housing Material</b>	Aluminum & PC Cover
<b>Housing Colour</b>	Aluminium
<b>Mounting Options</b>	Chain or Surface



# DIMENSIONS

DELTA LINEAR BR-T180W

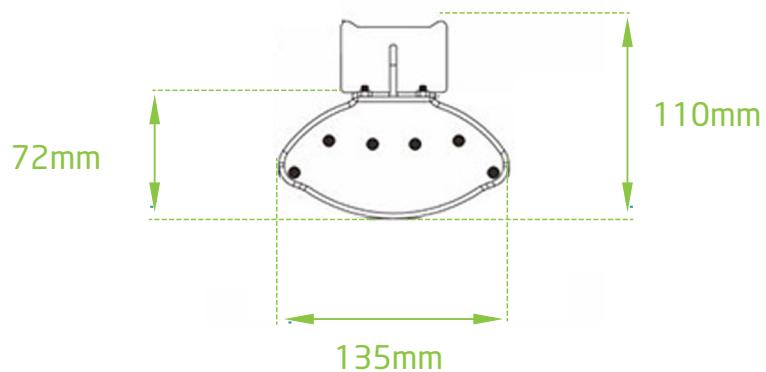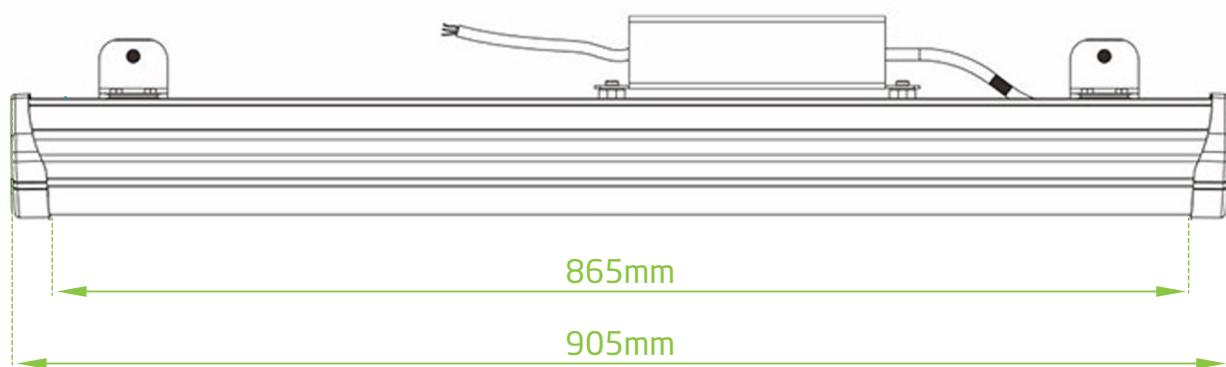

# PHOTOMETRICS

DELTA LINEAR BR-T180W

