


SIGMA

SLIM STREET LIGHT

30W

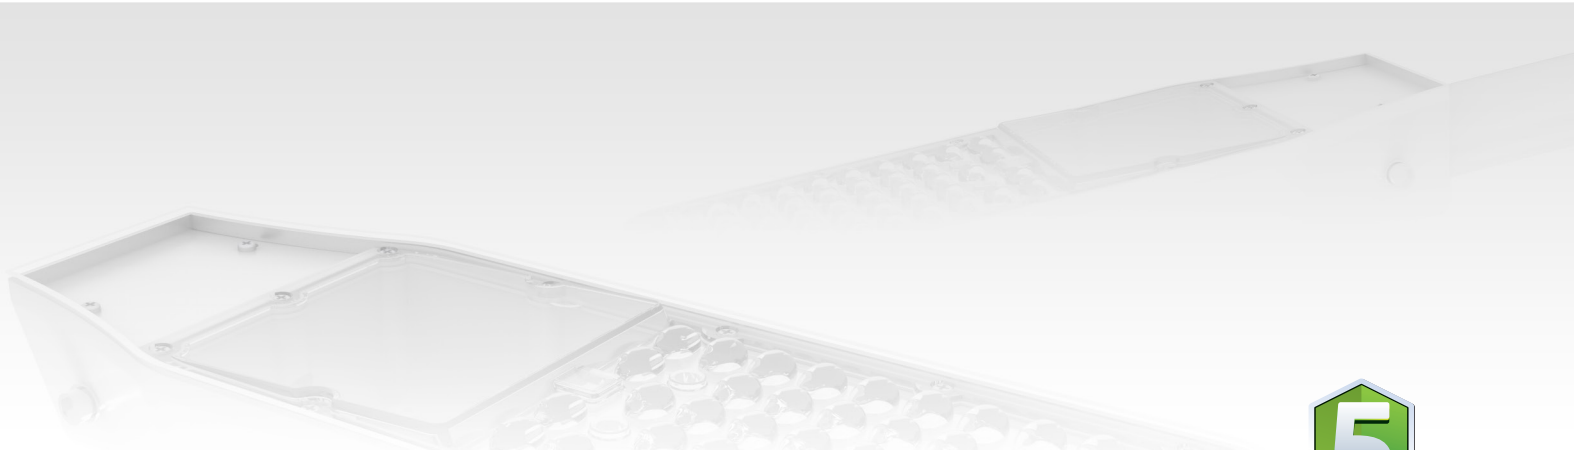

Brightmon™
design efficiency



TECHNICAL DATA


SIGMA SLIM STREET LIGHT 30W

Input Voltage	AC100-277V ~ 47/63 Hz
LED Chips	Nichia
Driver	Inventronics
LED Power	30W
Led Luminous Efficiency	125lm/W
Luminous Flux	3,750lm
Power Factor	>0.95
Colour Temperature	4500~5500K (2500~5500K optional)
Colour Rendering Index	Ra≥75
Beam Angle	55° x 145°
Illuminance Design	LED+lens
Working Temperature	-20°C ~ 50°C
Working Humidity	15%~ 90% RH
IP Rating	IP65
Net weight	1.6Kg
Life-span	>50,000hrs
Power Cable	1.0mm ² Triple shield wire
Connection Wire	Brown=Live, Blue=Neutral, Yellow=Earth
Housing Material	Die Cast Aluminum
Housing Colour	Dark Grey or Silver Grey
Mounting Options	Pole or Surface
Optional Extras	Daylight Sensor




DIMENSIONS

SIGMA SLIM STREET LIGHT 30W

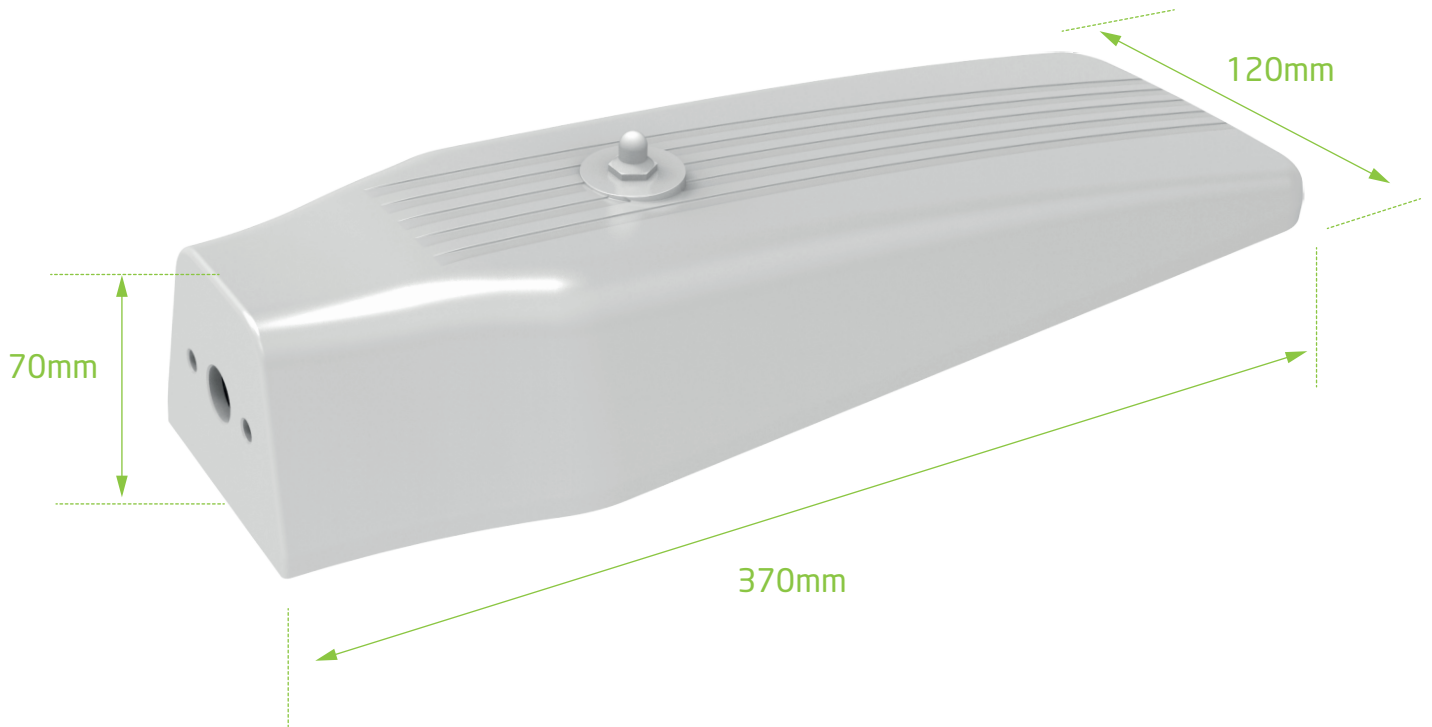

OPTIONAL DAYLIGHT SENSOR

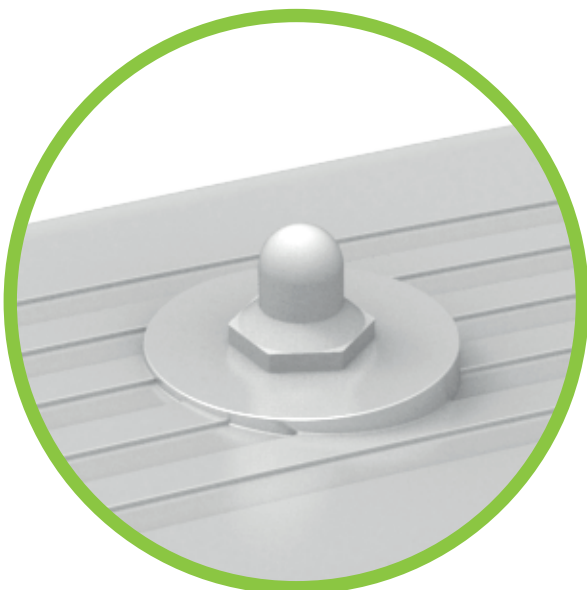

Increased savings and reduce your carbon footprint with automdimming sensors