


# SIGMA

SLIM STREET LIGHT

# 30W

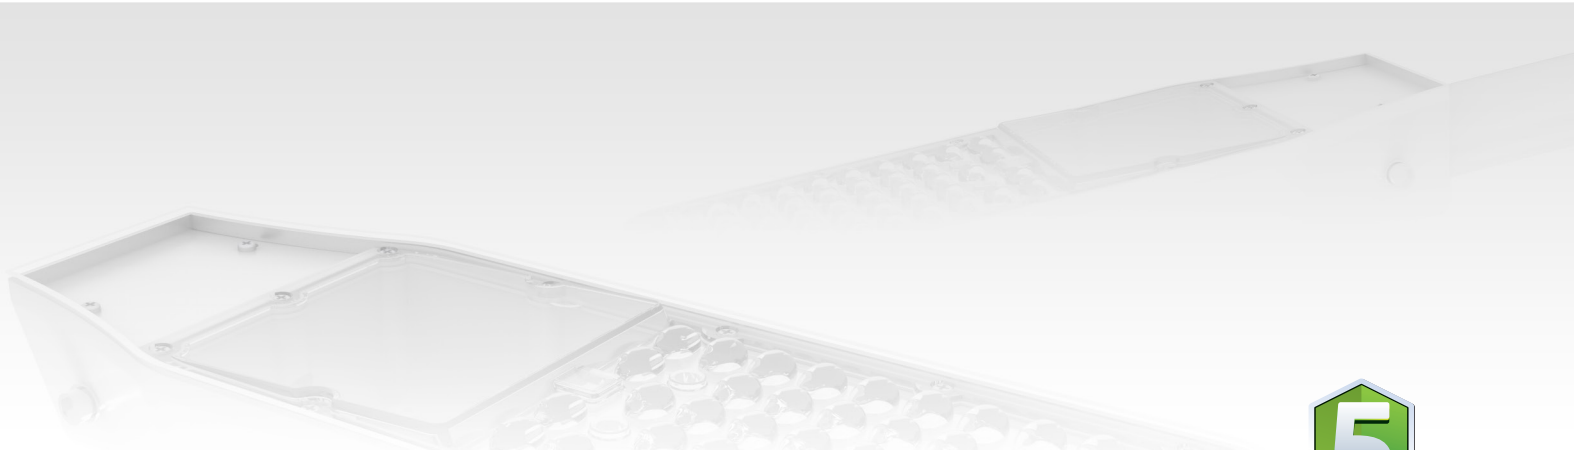

**Brightmon™**  
design efficiency



# TECHNICAL DATA


## SIGMA SLIM STREET LIGHT 30W

Input Voltage	AC100-277V ~ 47/63 Hz
LED Chips	Nichia
Driver	Inventronics
LED Power	30W
Led Luminous Efficiency	140lm/W
Luminous Flux	4,200lm
Power Factor	>0.95
Colour Temperature	4500~5500K ( 2500~5500K optional )
Colour Rendering Index	Ra≥75
Beam Angle	55° x 145°
Illuminance Design	LED+lens
Working Temperature	-20°C ~ 50°C
Working Humidity	15%~ 90% RH
IP Rating	IP65
Net weight	1.6Kg
Life-span	>50,000hrs
Power Cable	1.0mm <sup>2</sup> Triple shield wire
Connection Wire	Brown=Live, Blue=Neutral, Yellow=Earth
Housing Material	Die Cast Aluminum
Housing Colour	Dark Grey or Silver Grey
Mounting Options	Pole or Surface
Optional Extras	Daylight Sensor




# DIMENSIONS

SIGMA SLIM STREET LIGHT 30W

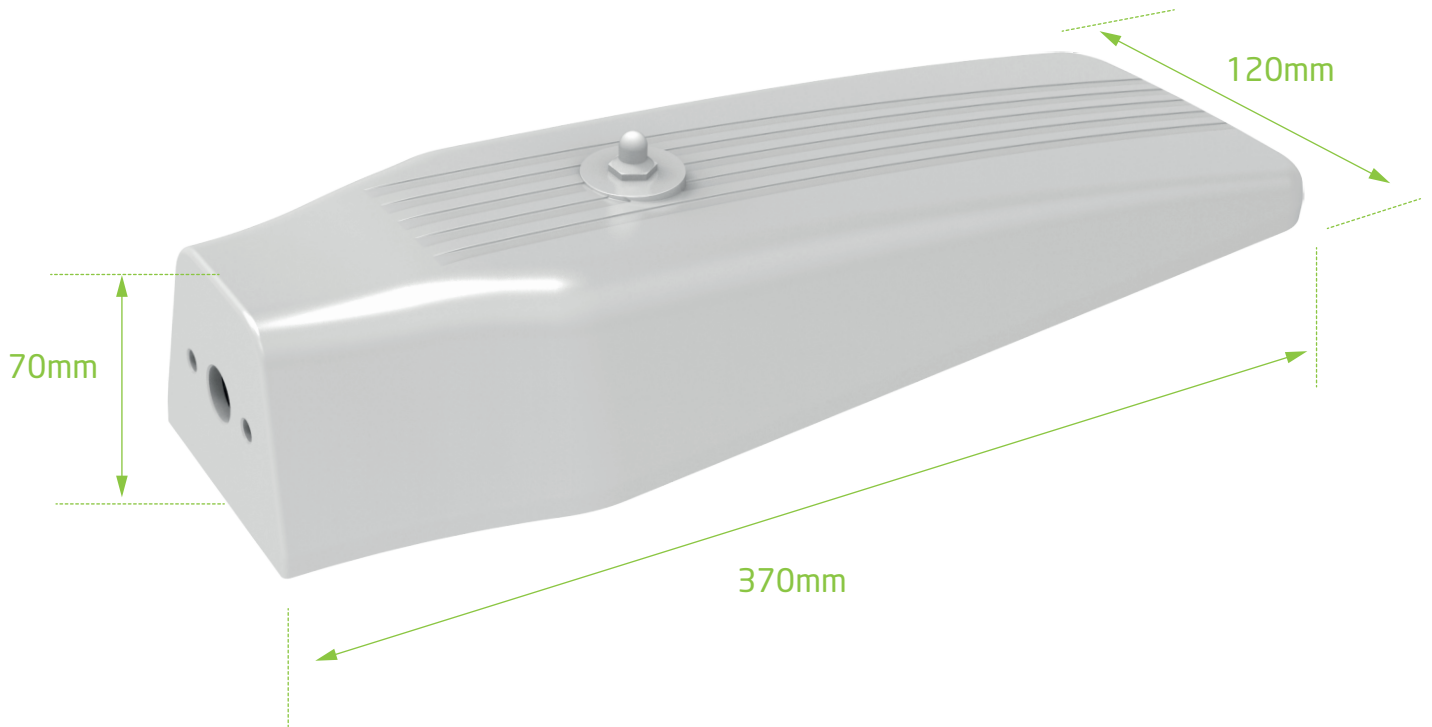

# OPTIONAL DAYLIGHT SENSOR

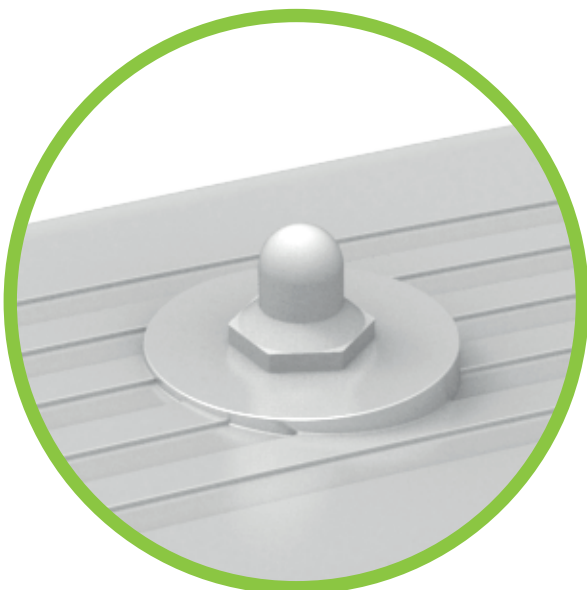

Increased savings and reduce your carbon footprint with automdimming sensors